


Industrial Hose Products

QRG 4800

Quick Reference Guide

Your Job. Our Hose.

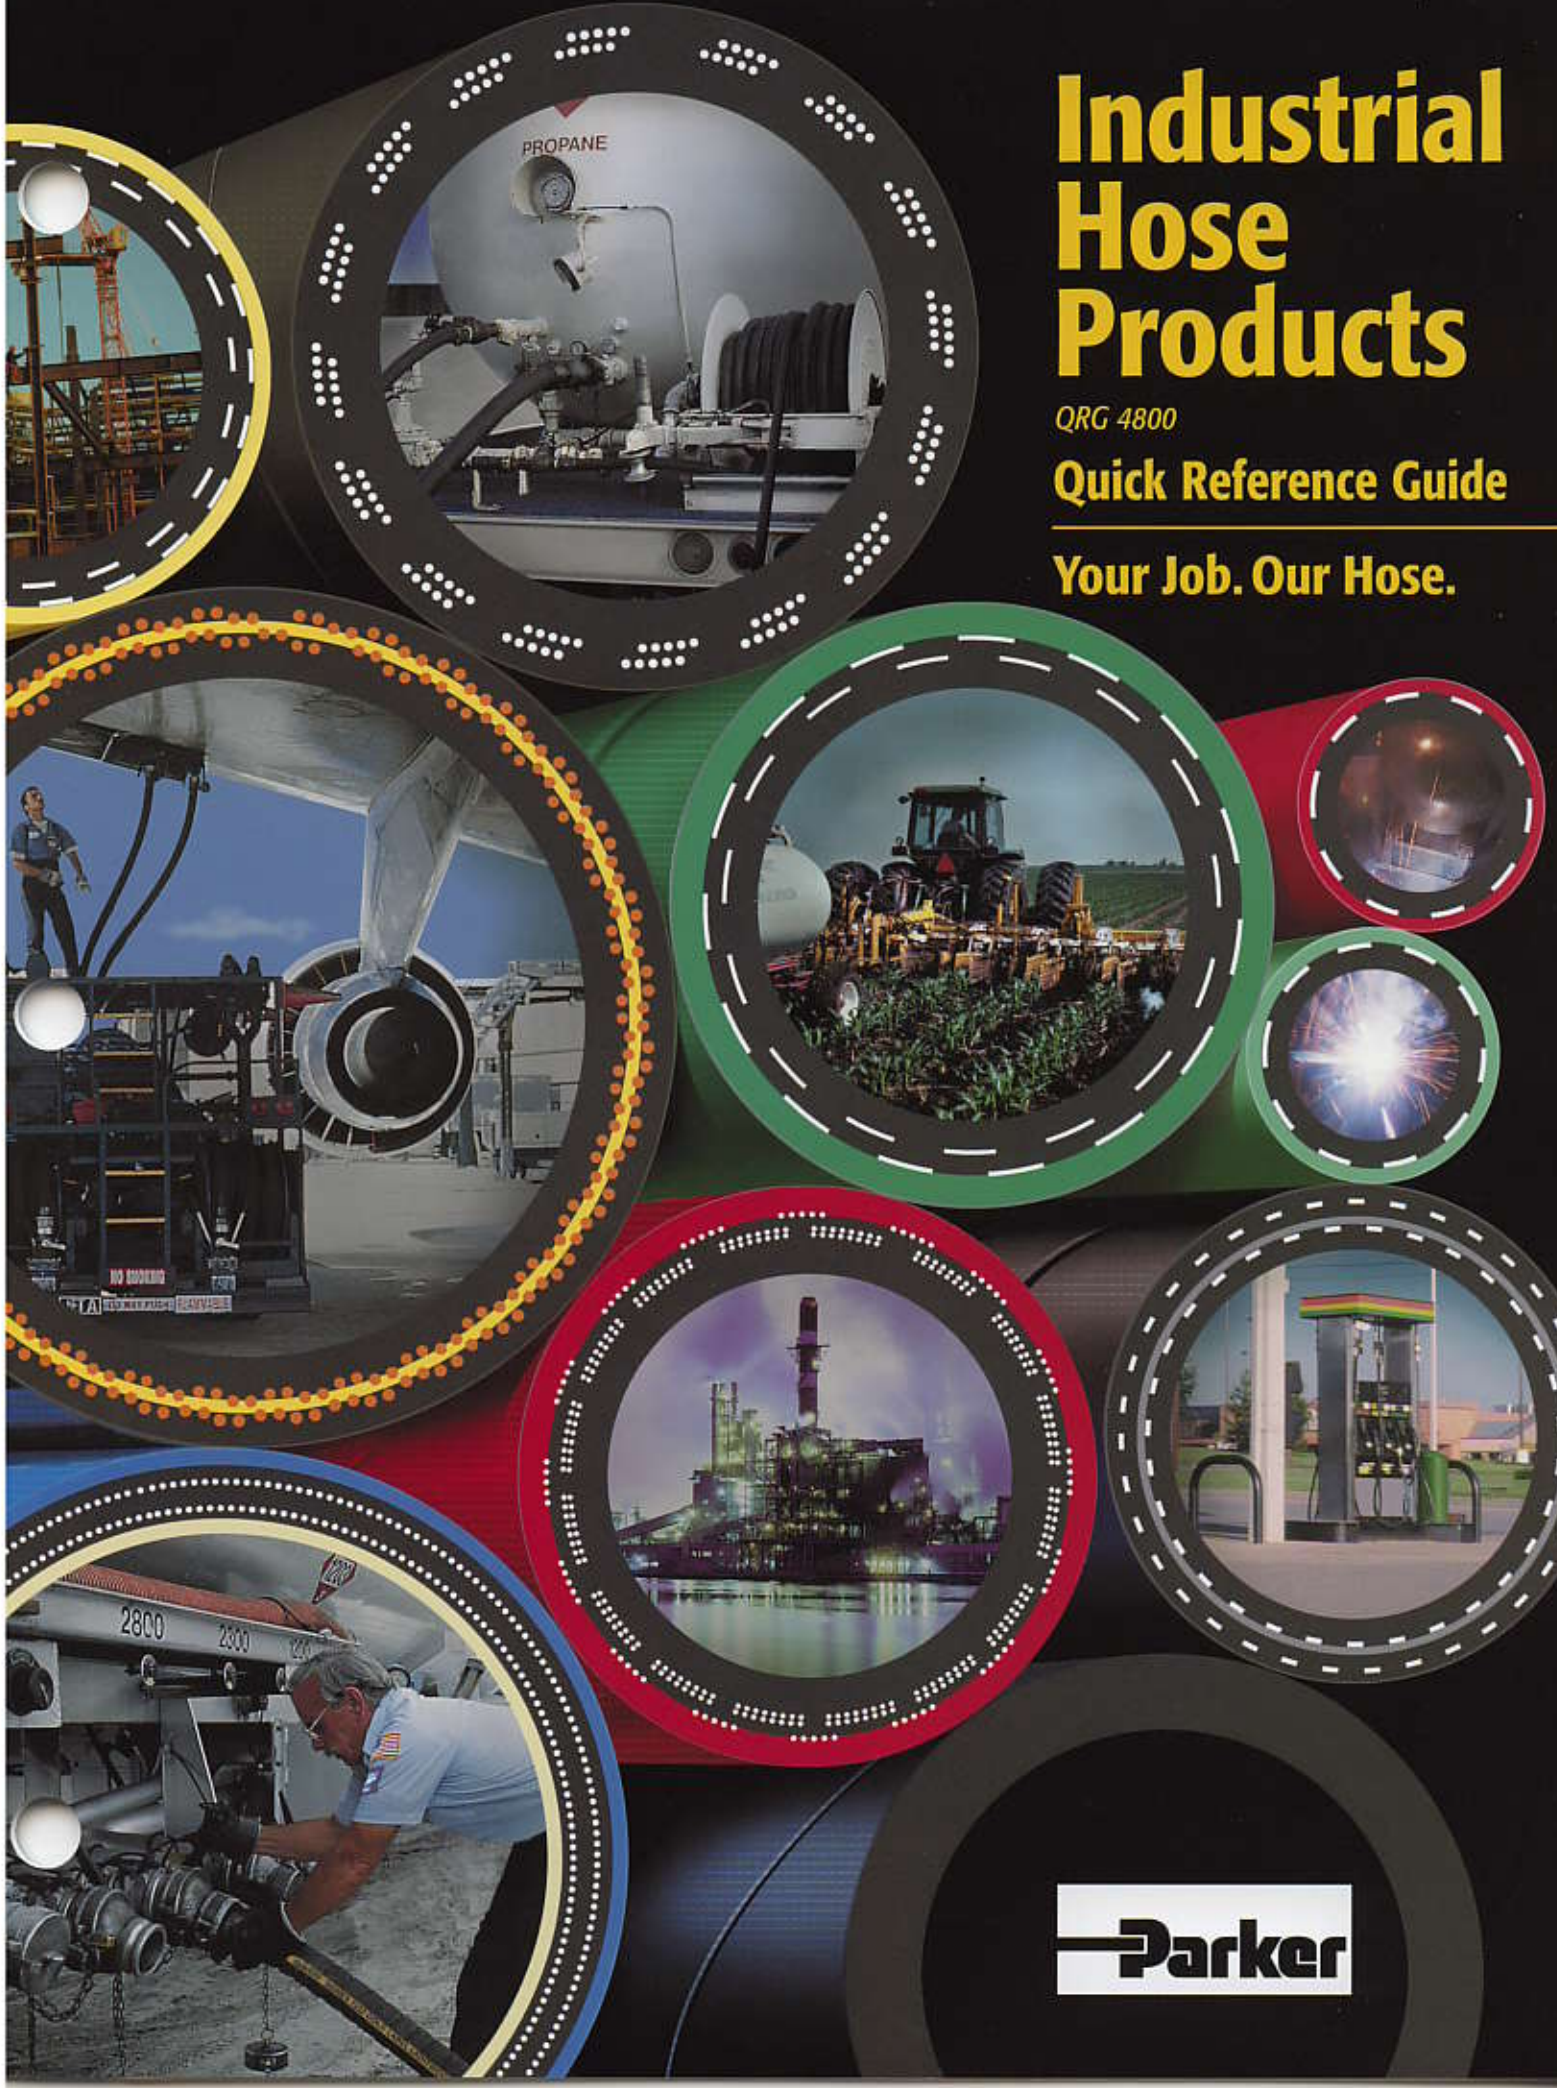


Parker

TO SERVICE OUR CUSTOMERS,
WE PROVIDE A WORLDWIDE NETWORK
OF KNOWLEDGEABLE PARKER
HOSE AND FITTING DISTRIBUTORS.

IN ADDITION, OUR
TECHNICAL SALES REPRESENTATIVES
WILL PROVIDE THE TRAINING
AND EXPERTISE YOU NEED
TO REMAIN COMPETITIVE
IN TODAY'S ENVIRONMENT.

FOR THE NAME OF THE
PARKER DISTRIBUTOR NEAREST YOU,
CALL 1-800-C-PARKER.
(1-800-272-7537)

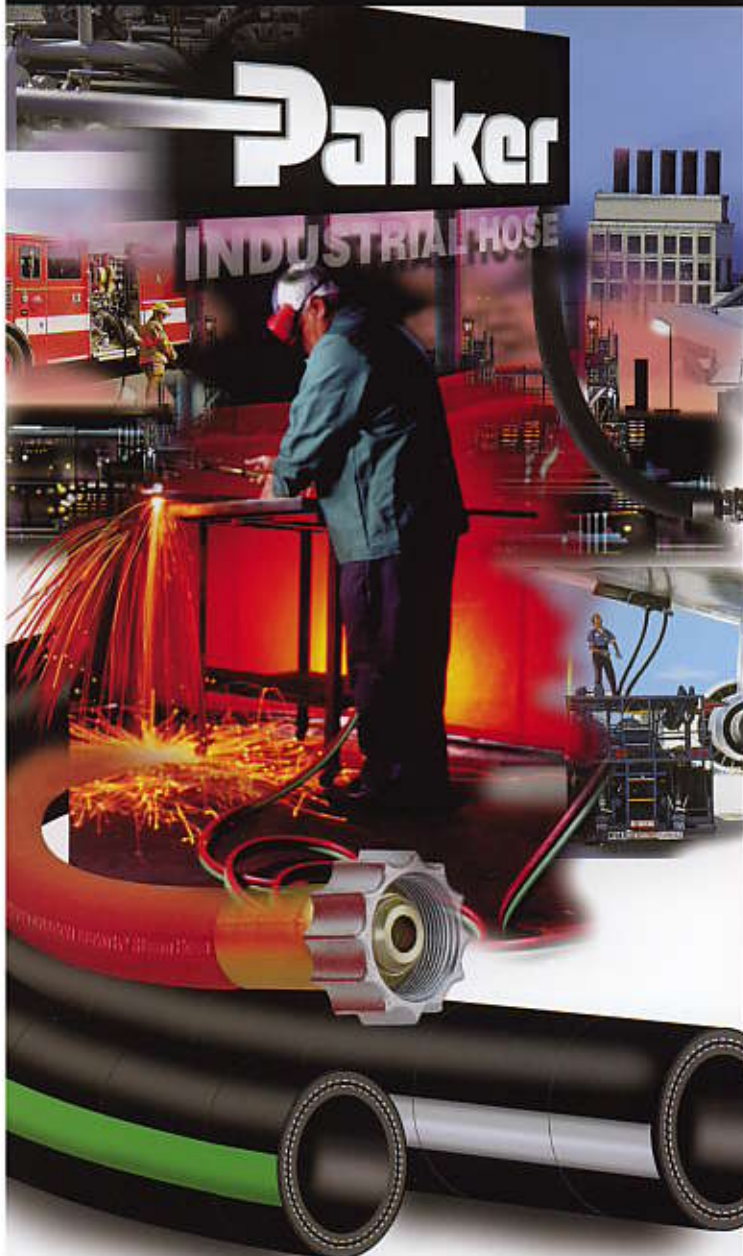

JIFFY® HOSE

Parker Jiffy® hoses are oil resistant, for use with air tools, water, mild chemicals, and various petroleum products.

- **Series 7212** Jiffy® hoses feature a special braid angle for quick and secure coupling retention. Offered in black, blue, gray, green and red. Sizes are 1/4" to 3/4".



CHEMICAL TRANSFER

Parker chemical transfer hose products provide a wide range of products for suction and discharge of chemicals in production or transport applications. Products include XLPE lined hose and UHMWPE lined hose operating at temperatures up to 250°. Sizes 1" to 3" are available with the Parker Safe Hose crimp coupling program.

- **Series 7274** Poly-Chem® (corrugated) and **Series 7276** Poly-Chem (smooth) hose operates at temperatures up to 160° and is appropriate for 96% of industrial chemicals. Sizes up to 6".
- **Series 7373** Blue Thunder™ UHMW lined hose operates at temperatures up to 250° and is appropriate for 98% of industrial chemicals. Sizes up to 4".



ANHYDROUS AMMONIA

Parker offers hoses appropriate for conveying anhydrous ammonia. These hoses are 100% pressure tested and are available with crimp couplings.

- **Series 7261** is a stainless-reinforced hose. Sizes are 1" to 2".
- **Series 7262** is a nylon-reinforced hose. Sizes are 1/2" to 2".



FOOD HANDLING

Parker food handling hose products include washdown hose, food discharge, and food suction and discharge products.

- **Series 7079** ECW™ Economy Washdown Hose is lightweight with a 300 psi working pressure. Size is 3/4".
- **Series 7080** HDW™ Creamery Washdown Hose is heavy-duty for hot water and steam. Size is 3/4".
- **Series 7360** Wildcatter® Hose is a rugged and flexible washdown hose with optional built-in nozzles. Sizes are 1/2" to 2".
- **Series 7143** High Pressure Washdown Hose is a fabric-reinforced poultry hose offered in 1000 and 1500 psi working pressures. Sizes are 1/4" to 3/8".
- **Series 7247** Blue Ribbon® Pressure Washer Hose is a washdown hose featuring one wire braid, abrasion resistance and a 1500 psi working pressure. Sizes are 1/4" to 1/2".
- **Series 7304** NBR Discharge Hose is a FDA-approved food handling hose with a white NBR tube, gray EPDM cover. Sizes are 1 1/2" to 4".
- **Series 7305** Butyl Suction & Discharge Hose is a FDA-approved food handling hose with a white butyl tube, gray EPDM cover. Sizes are 2" to 4".
- **Series 7310** NBR Suction & Discharge Hose is a FDA-approved food handling hose with a white NBR tube, a gray EPDM cover. Sizes are 1 1/2" to 4".



PETROLEUM DISPENSING

Parker petroleum dispensing products meet the needs of the ever-changing marketplace with both standard curb pump and vapor recovery hoses.

- **Series 7124** Super-Flex® 2000 Hose is a premium standard curb pump hose appropriate where a wire braid Hardwall is required. Sizes are 5/8" to 1".
- **Series 7114** Soft-Flex 2000 Hose is an economical standard curb pump hose appropriate when a Hardwall is not required. Sizes are 5/8" to 1".
- **Series 7280** Flex-Ever™ 2000 Hose is a premium standard curb pump hose where a true Hardwall is required. Sizes are 5/8" to 1".
- **Series 7574** Petroflex™ 2000 Hose System is utilized for balanced vapor recovery systems.
- **Series 7246** Flex-Ever Ultimate™ and **Series 7253** Flex-Ever Ultimate™ II Hoses are active vapor recovery hoses. Sizes are 3/4" and 7/8".



MATERIAL HANDLING

Parker material handling hose products were designed to effectively work with the most extreme applications and conditions, including cement, plaster, concrete, sandblast and rock dust.

- **Series 7218** Driline® Cement Hose is available in 1/8", 3/16", 1/4" tube thicknesses, is static conductive and has a 60 psi working pressure. Sizes are 3" to 6 5/8".
- **Series 7236** Plaster and Concrete Hose is static conductive and has a 800 psi working pressure. Sizes are 1 1/4" to 2".
- **Series 7363** Super-Flex™ Hose is a material suction hose featuring a 3/16" tube. Hose is static conductive and is rated for full suction. Sizes are 2" to 6".
- **Series 7393** Rock Dust Hose is a lightweight and flexible hose that is static conductive, rated for full suction and has a 50-90 psi working pressure. Sizes are 1 1/2" to 3".
- **Series 7244 and 7245** Sandblast Hoses are 4-ply and 2-ply hoses designed for sandblasting and for abrasive materials transferred at high velocity. A conductive tube eliminates the need for a static wire. Sizes are 1/2" to 3".
- **Series 7570, 7560 and 7561** PVC Material Transfer Hoses are economical, lightweight and flexible. Sizes up to 8".



AIR, WATER AND MULTI-PURPOSE

Parker offers a comprehensive line of hoses for air, water and petroleum transfer.

- **Series 7092** GST®II General Service Air and Water Hose is versatile, with an EPDM tube and cover. Sizes are 3/16" to 1 1/2".
- **Series 7094** MPT®II Multipurpose Hose is oil resistant and non-conductive. Sizes are 3/16" to 1 1/2".
- **Series 7257** Day-Flo® Standard-Duty Water Suction Hose. Sizes are 1 1/4" to 4".
- **Series 7306** Day-Flo® Standard-Duty Water Discharge Hose. Sizes are 1 1/2" to 12".
- **Series 7107** Grizzly™ Premium, Heavy-Duty Hose is oil resistant and non-conductive. Sizes are 1/4" to 1".
- **Series 7268** Stinger Mine™ Spray Hose is durable, with a MSHA cover designed to handle severe service requirements. Sizes are 3/4" to 2".